




Hindbookcenter

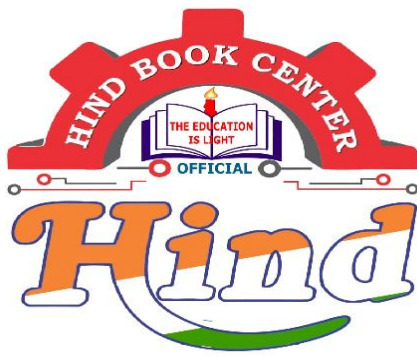

Hind Book Center & Photostat


MADE EASY

Electrical Engineering
Toppers Handwritten Notes
D.C AND INDUCTION MACHINE
BY Murli Sir

- Colour Print Out
- Blackinwhite Print Out
- Spiral Binding,& Hard Binding
- Test Paper For IES GATE PSUs IAS, CAT,SSC
- All Notes Available & All Book Availabie
- Best Quaity Handwritten Classroom Notes & Study Materials
- IES GATE PSUs IAS CAT Other Competitive/Entrence Exams

Visit us:-**www.hindbookcenter.com**

Courier Facility All Over India
(DTDC & INDIA POST)
Mob-9711475393

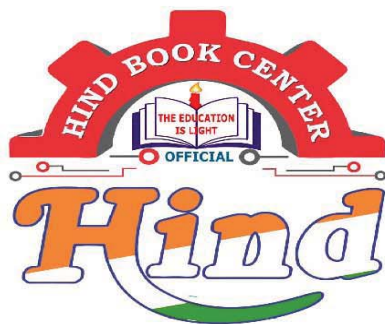

Hindbookcenter



ALL NOTES BOOKS AVAILABLE ALL STUDY MATERIAL AVAILABLE

COURIERS SERVICE AVAILABLE

MADE EASY, IES MASTER, ACE ACADEMY, KREATRYX

ESE, GATE, PSUs BEST QUALITY TOPPER HAND WRITTEN NOTES

MINIMUM PRICE AVAILABLE @ OUR WEBSITE

- | | |
|--------------------------------|---------------------------|
| 1. ELECTRONICS ENGINEERING | 2. ELECTRICAL ENGINEERING |
| 3. MECHANICAL ENGINEERING | 4. CIVIL ENGINEERING |
| 5. INSTRUMENTATION ENGINEERING | 6. COMPUTER SCIENCE |

IES, GATE, PSU TEST SERIES AVAILABLE @ OUR WEBSITE

❖ IES –PRELIMS & MAINS

❖ GATE

➤ NOTE;- ALL ENGINEERING BRANCHS

➤ ALL PSUs PREVIOUS YEAR QUESTION PAPER @ OUR WEBSITE

PUBLICATIONS BOOKS -

MADE EASY, IES MASTER, ACE ACADEMY, KREATRYX, GATE ACADEMY, ARIHANT, GK

RAKESH YADAV, KD CAMPUS, FOUNDATION, MC –GRAW HILL (TMH), PEARSON...OTHERS

HEAVY DISCOUNTS BOOKS AVAILABLE @ OUR WEBSITE

Shop No.7/8 Saidulajab Market Neb Sarai More, Saket, New Delhi-30	Shop No: 46 100 Futa M.G. Rd Near Made Easy Ghitorni, New Delhi-30	F518 Near Kali Maa Mandir Lado Sarai New Delhi-110030	Shop No.7/8 Saidulajab Market Neb Sarai More, Saket, New Delhi-30
--	---	--	--


Website: www.hindbookcenter.com

Contact Us: 9711475393

CHRISTIAN ØERSTED 1820 Electro magnetism :-


Relation b/w Electricity and magnetism

There is magnetic field around a current carrying conductor



current carrying conductor producing concentric flux line [Right hand Thumb rule] By using R-H thumb rule fingers represent flux line direction and thumb in the current direction.

Every electrical machine is working because of flux (ϕ) unit-weber



MICHAEL FARADAY (Father of Electricity) 1831 Electro Magnetic Induction :-

If current produce flux then why can't flux produce current?

NIKOLA TESLA 1880 RMF :- Rotating magnetic field

Induction & Synchronous machine is working on the basis of RMF
NIKOLA TESLA is behind AC power system.

ISSAC NEWTON 1687 Law's of motion



3rd law : Action $\longrightarrow$ opposite reaction len's law

The result always the opposes the cause of it.

- DC machine :-

Electrical Machine :-

Electro-Mechanical Energy conversion device

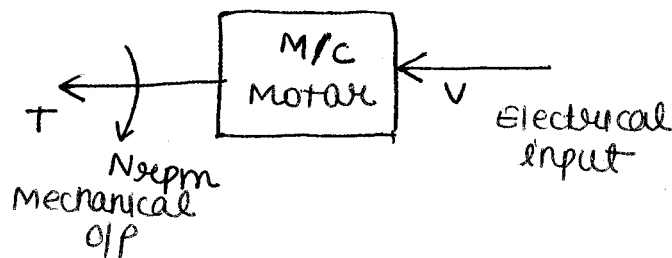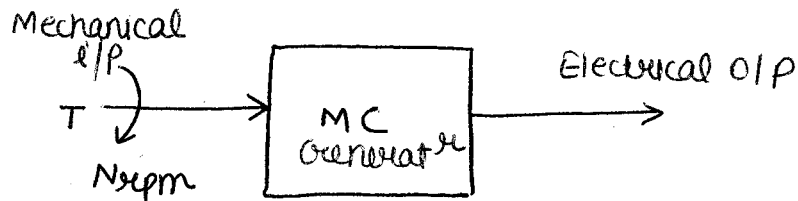


Electro mechanical : Reversible process [Pump storage Plant]

To maintain the load factor, under light load condition acting like motor as well as making the water go back for ready the dam for peak load condition acting as generator.

Generator :-

We are supplying torque then generator is rotating in one direction, when the generator is giving electrical o/p then in the generator another torque is produce. so in the generator voltage is produced as well as torque is also produce this torque which is produce in generator is exactly oppose the torque what we are giving.

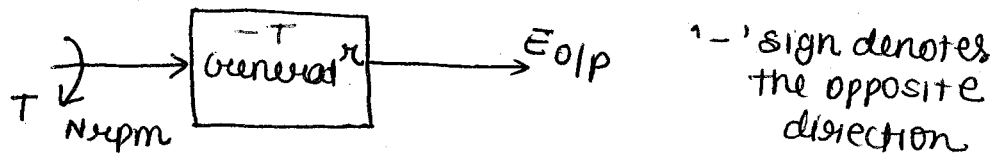

Motor :- when m/c is working as motor, we are giving some voltage then in m/c another voltage is developed which is exactly opposite to supply voltage.



M/C $\begin{cases} \rightarrow G: V \& T \text{ generated} \\ \rightarrow M: T \& V \text{ generated} \end{cases}$

Energy is never generated, so, Generator can't generate any by itself unless we rotate the generator.

When a m/c is acting like generator mode or motor mode two things are commonly happen (V & T) that's why DC mach can be used as motor as well as Generator.

Transformer is not a electrical machine because there is no electro-mechanical energy conversion happens in it. In transformer more electro-magnetic conversion takes place internally.


DC Generator :-

construction details of DC generator is exactly similar to DC motor, difference in characteristic and application.

DC generator, is rotating electrical m/c which is designed to take the advantage of electromagnetic induction in order to convert mechanical energy into DC electrical energy.

Faraday's law of Electro magnetic Induction :-

The phenomenon of producing induced emf in a conductor through a change in magnetic field.

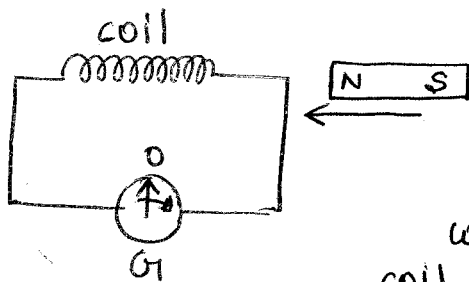

When the magnet is stationary then [near the coil] galvanometer is deflecting zero.

When the magnet is moved near to the coil or inside the coil then galvanometer is deflecting in one direction. If movement is fast then more deflection, if it is slow then less deflection. i.e; there will be change in the magnetic field due to movement. Now change in magnetic field is responsible to produce induced emf in the coil.

Whenever a conductor cuts a magnetic flux, a dynamically induced emf in the conductor.

Induced law: The magnitude of induced emf is directly proportional to rate of change of flux linkages.


Flux : ϕ webers

conductor $\propto N$

conductor $\propto N$ Flux linkage (λ) = $\phi \cdot N$

Flux : ϕ webers
Flux linkage means the interaction between flux and conductor

$\downarrow$ $\downarrow$
magnet cu wire

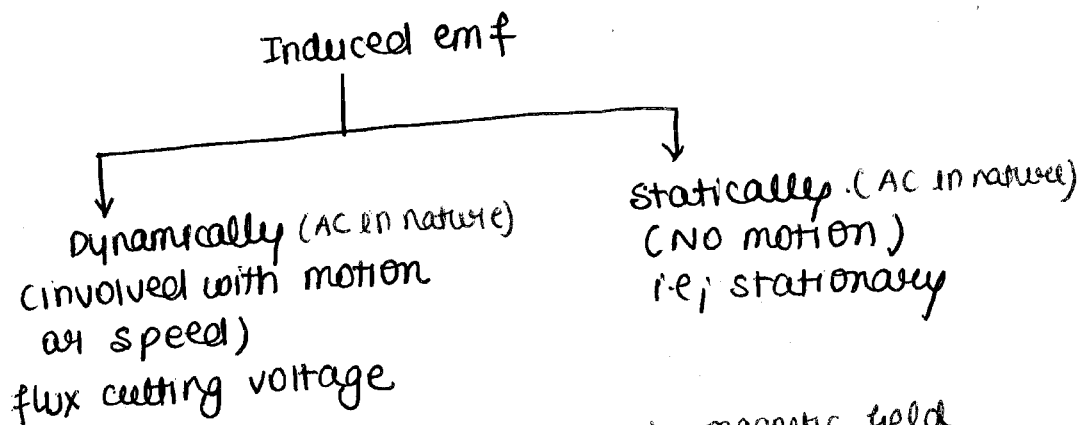


Flux %—

- (a) Time in varying flux / steady magnetic field
- (b) Time varying flux


⑥ Time varying flux

In time in varying flux, the flux is not varying w.r.t time

Ex-: Permanent magnet



The diagram shows a vertical bar representing a permanent magnet. To its left, a vertical line with an upward arrow is labeled 'DC'. To its right, a circle with a vertical line through it and a curved arrow indicates a magnetic field. To the right of the magnet, a graph shows a horizontal line on a coordinate system with a vertical axis and a horizontal axis labeled 't'.



when we give ^{AC} supply to conductor then we get continuously time varying current which is obviously produce time varying flux in it.

$$e = \frac{d\lambda}{dt} \text{ volts}$$

$$= \frac{d(N\phi)}{dt} = N \frac{d\phi}{dt}$$

$$e = N \frac{d\phi}{dt} \text{ VOLTS}$$

$$e = N \frac{d\phi}{dt} \times \frac{dr}{dt}$$

$$e = -N \frac{d\phi}{dt} \text{ volts}$$

↓
- sign represent lenz's law

$$e = -L \frac{di'}{dt} \text{ volts}$$

conductor behaves like induc-
tor.

When there is rate of change of flux linkages conductor behaves as an inductor. Inductor will oppose the change in current. So to communicate the opposition factor we put negative sign. This negative sign doesn't represent any polarity or motion in DC M/C.


→ If the flux is time varying in nature, it requires relative motion between flux and conductor for effective rate of change of flux linkages (one should rotate w.r.t. other)

→ If the flux is time varying then it automatically produces voltages with stationary conductor because of inherent rate of change (No need of relative motion)

Three mode of flux linking :-

① Flux : Flux is stationary and nature is time varying.
conductor : Rotating

magnet : stationary then flux will be stationary & having time varying nature



Place a conductor on rotating part & don't rotate the rotating part then there is flux and conductor but missing the rate of change of flux linkage


If we want to create rate of change of flux linkage in time varying flux then we require one should rotate w.r.t. other. i.e. either flux or conductor or one should rotate w.r.t. other then relative motion occurs → rate of change of flux linkage occurs produce induced emf.

Ex: DC machine (dynamically induced emf)

↳ Rotation is involved

② Flux : Flux is rotating and nature is Time varying
conductor : stationary

in this when we start rotating then magnet is also rotate due to which flux is rotating but flux is time varying only.

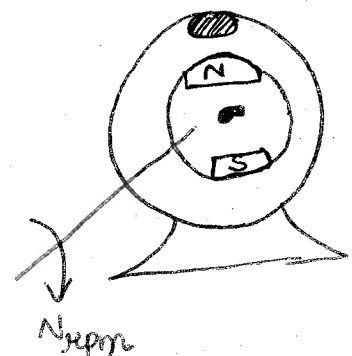

Rate of change of flux linkage occurs in conductors which produces dynamically induced emf.


Ex:- Synchronous machines

To collect the current from stationary part is so easy.

(2) Flux: stationary & Time varying
conductor: stationary

DC voltage $\rightarrow \Phi$ & conductor

is @ stationary there is no rate of change of flux linkage. never work on DC.

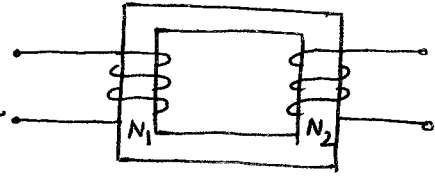

AC supply $\rightarrow$ Time varying

$\rightarrow$ natural rate of change of flux linkage

$\downarrow$
enough to produce induced emf

Ex:- Transformer (Induction m/c is nothing but rotating x-mtr) (statically induced emf)



$\rightarrow$ NO motion require

working of a simple loop generator:-

In order to produce induced emf in a conductor, require

(a) Flux (b) conductor (c) prime mover According to FLEMING

Rotate the conductor b/w magnetic field.

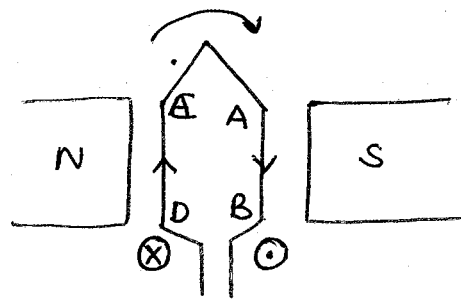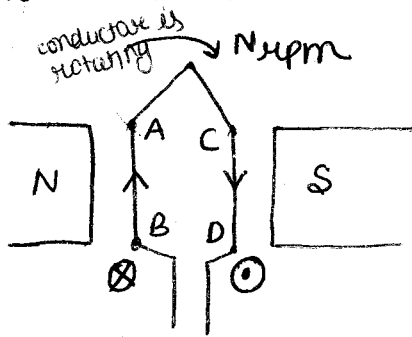

is moving up $\uparrow$ AB $\odot$ CD $\downarrow$ is moving down
[0° - 180°] mechanical degrees

$\uparrow$ CD $\odot$ AB $\downarrow$
[180° - 360°] mechanical degrees

we use Fleming's right hand rule in order to know dynamically induced emf.

$$e = Blv \sin \theta$$

B = flux density (Tesla)

l = Active length of conductor
i.e. length who cut the flux

v = peripheral velocity = $\frac{\pi DN}{60}$


θ = angle between flux & conductor

D = Diameter of armature


Fleming right hand's rule :-

Forefinger $\rightarrow$ Flux Thumb $\rightarrow$ Motion force


middle finger $\rightarrow$ Direction of current or induced voltage in conductor [To know]



when bulb is connecting to it then bulb is also get rotated which is problem for the designing purpose. For to be stationary the load we need idea which is sliding contact. But if we use one ring then it short circuit the coil.

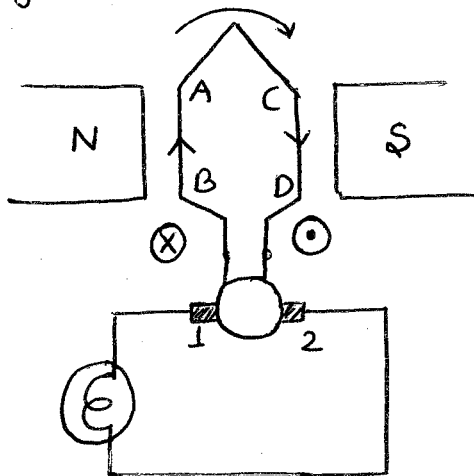

so, we go for two ring concept

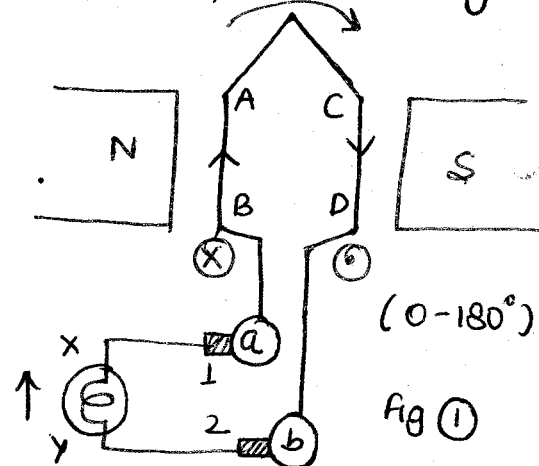

current direction : $B \rightarrow A \rightarrow C \rightarrow D \rightarrow b \rightarrow 2 \rightarrow y \rightarrow x \rightarrow 1 \rightarrow a \rightarrow B$

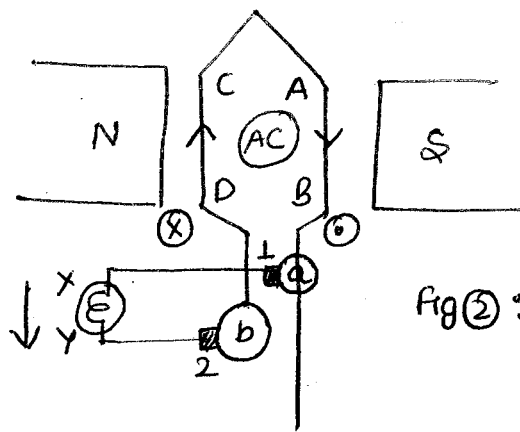


Fig 2:


current direction: $\overrightarrow{DCAB} \perp \overrightarrow{XY} \rightarrow \overrightarrow{ZBD}$
 Bidirectional current in coil i.e. AC

in the coil: AC


in the bulb: AC

i.e. this is AC generator.



AC is collected as AC when connect two ring are slip ring.



when conductors make one rotation then conductors will pass south pole and then also north pole. so, if south pole produce one pulse then north pole produce opposite. [There is no rule is south pole producing + or -ve & north pole producing +ve or -ve]



with 2 pole: 1 cycle in one rotation

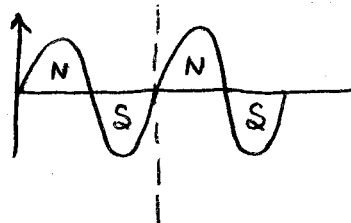

with 4 pole: 2 cycle in one rotation

with P pole: $P/2$ cycle/rot

$$\text{No. of cycles/rotation} = P/2$$

$$\text{No. of Rotation/sec} = N/60$$

N is in rpm.

$$\frac{\text{cycles}}{\text{rotation}} \times \frac{\text{rotation}}{\text{sec}} = \frac{P}{2} \times \frac{N}{60}$$

$$f = \frac{\text{cycle}}{\text{sec}} = \frac{PN}{120}$$

or

$$N = \frac{120f}{P}$$